




Fold Down Bollards

Fold Down Bollards have been designed for vehicle access control applications. In the flat position, the bollard is a low 80mm high to allow easy vehicle clearance. In the upright position, it stands 800mm high with a broad face of 150mm wide that includes one reflective sign for greater visibility. FD150 is supplied with a 40mm padlock and 2 keys, or for a greater level of security choose the key lockable FD150K model which includes two keys. Supplied with fixings for surface mount installation or purchase the additional BGK4 in-ground kit when setting into new concrete. For installation into asphalt it is recommended to use a concrete footing for added strength and stability.

STYLE	PART No.	A	B	C	D	E	F	G	FINISH
1	FD150	150	800	80	200 x 200	10	12	5	HDG+PC
2	FD150-G	150	800	80	200 x 200	10	12	5	HDG
3	FD150K	150	800	80	200 x 200	10	12 <td 5	HDG+PC	
4	BGK4	In-ground mounting kit for FD150							
5	FDS1	Reflective sign face with Red/Yellow diagonal stripes							

Note: All dimensions in mm – (A) Bollard width, (B) Upright height, (C) Fold down height, (D) Base plate LxW, (E) Base plate thickness, (F) Shipping weight (Kgs), (G) Operating weight (Kgs). Finish: Hot Dip Galvanised (HDG) only/and Powder Coated (PC).

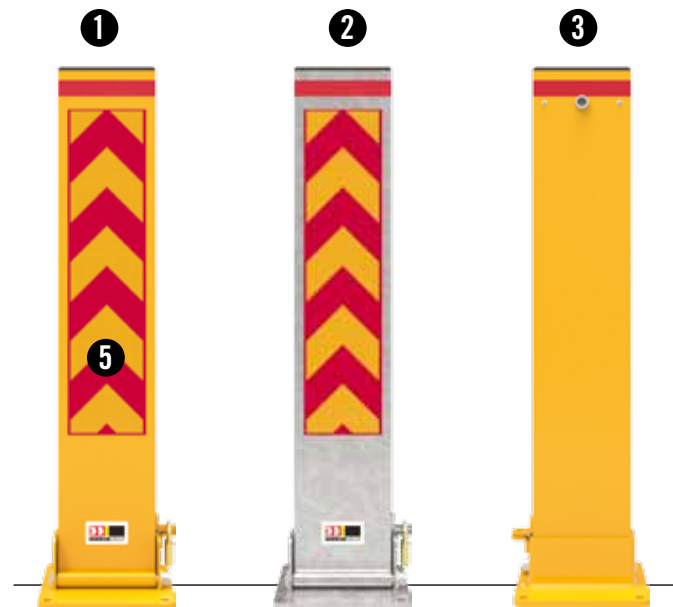

Padlock model
Front view

Padlock model
Galvanised

Keylock model
Rear view