


# KELRYAN

## Galvanised U-Bars Heavy Duty Steel

Heavy duty one-piece steel U-Bars with a 5mm wall thickness and 90mm diameter in surface mount or below ground models. Available in three standard lengths, they come hot dip galvanised and can be supplied with or without powder coated surface finishes. Below ground model has welded concrete starter bars, while fixings are supplied with surface mount models. **Note:** Hot dip galvanised and Safety Yellow are standard, optional powder coat colours area available on request.

Powder coated colours  
available on request.  
Charges will apply.

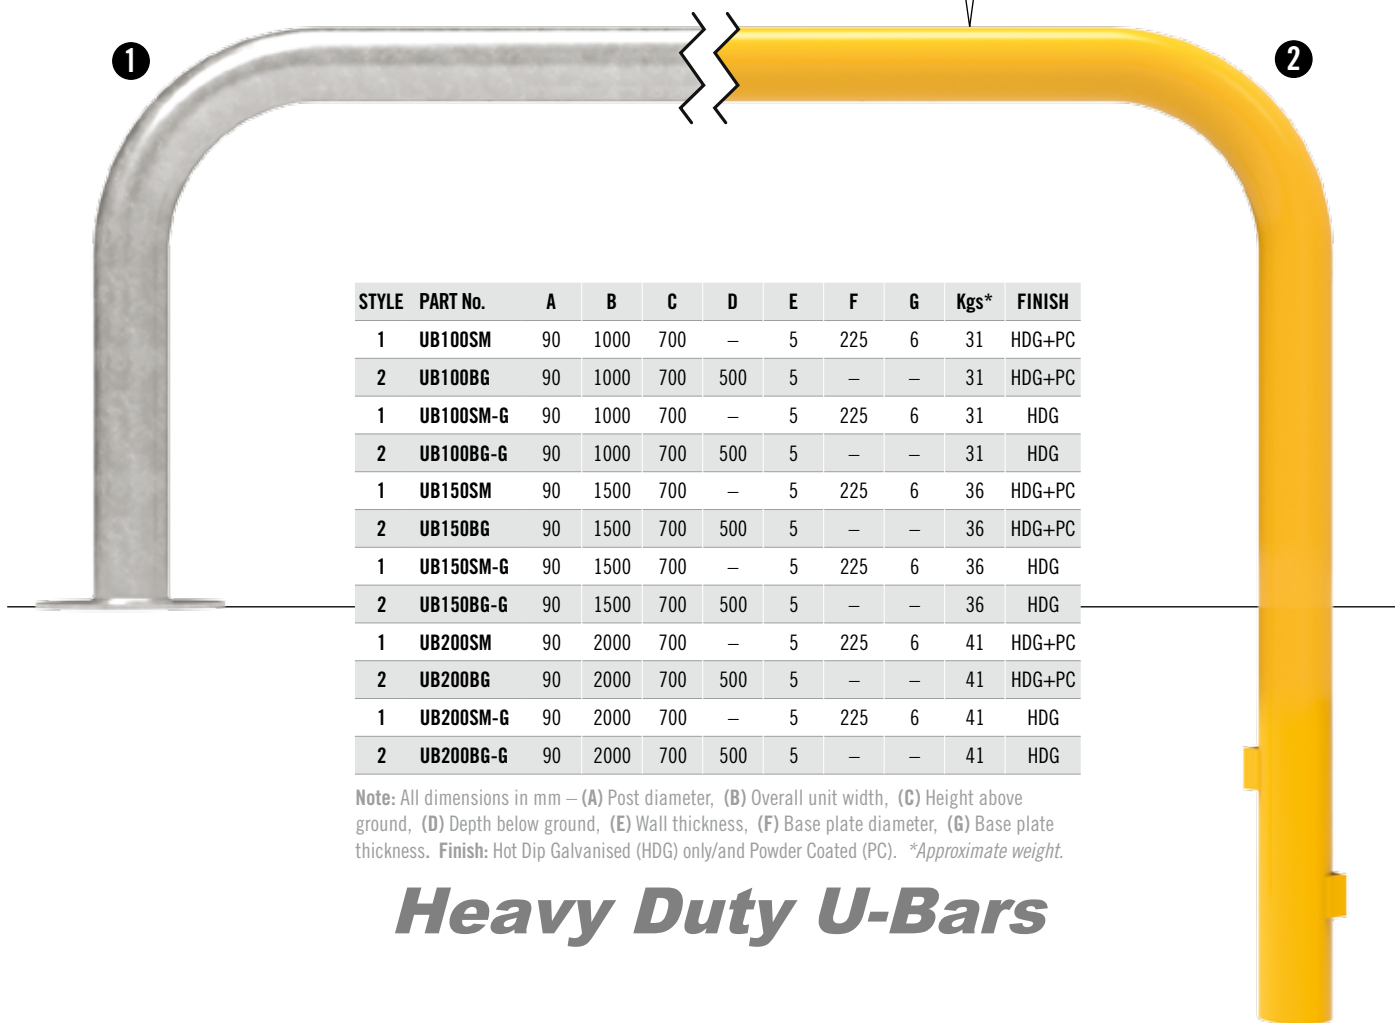

STYLE	PART No.	A	B	C	D	E	F	G	Kgs*	FINISH
1	UB100SM	90	1000	700	–	5	225	6	31	HDG+PC
2	UB100BG	90	1000	700	500	5	–	–	31	HDG+PC
1	UB100SM-G	90	1000	700	–	5	225	6	31	HDG
2	UB100BG-G	90	1000	700	500	5	–	–	31	HDG
1	UB150SM	90	1500	700	–	5	225	6	36	HDG+PC
2	UB150BG	90	1500	700	500	5	–	–	36	HDG+PC
1	UB150SM-G	90	1500	700	–	5	225	6	36	HDG
2	UB150BG-G	90	1500	700	500	5	–	–	36	HDG
1	UB200SM	90	2000	700	–	5	225	6	41	HDG+PC
2	UB200BG	90	2000	700	500	5	–	–	41	HDG+PC
1	UB200SM-G	90	2000	700	–	5	225	6	41	HDG
2	UB200BG-G	90	2000	700	500	5	–	–	41	HDG

**Note:** All dimensions in mm – (A) Post diameter, (B) Overall unit width, (C) Height above ground, (D) Depth below ground, (E) Wall thickness, (F) Base plate diameter, (G) Base plate thickness. Finish: Hot Dip Galvanised (HDG) only/and Powder Coated (PC). \*Approximate weight.

## Heavy Duty U-Bars