

KELRYAN

THE PITBULL

A bollard with real bite


With a diameter of 168mm and a wall thickness of 12mm this is one bollard you don't want to mess with. Available in either fixed in-ground or removable in-ground models. Removable models allow access for construction or maintenance etc. Forget surface mount bollards, in this company they just don't stand up to the abuse a Pitbull can take!

Note: At around 100kgs these guys require some form of mechanically assisted lifting.

Hot dip galvanising is the standard finish, however powder coated finishes or our polyethylene Skinz can be optioned. (For more information on Skinz see page 06).

Product Features:

- Ridiculously strong 12mm thick wall for ultimate strength
- Stands 1200mm above ground
- Available in fixed or removable in-ground models
- Removable model includes in-ground steel sleeve
- Hot dip galvanised finish as standard
- Cast aluminium cap conceals mechanical lifting point
- Welded concrete anchors ensure maximum embedment
- Recommended minimum 30mpa concrete footing
- Ideal for high security or transport depot installations

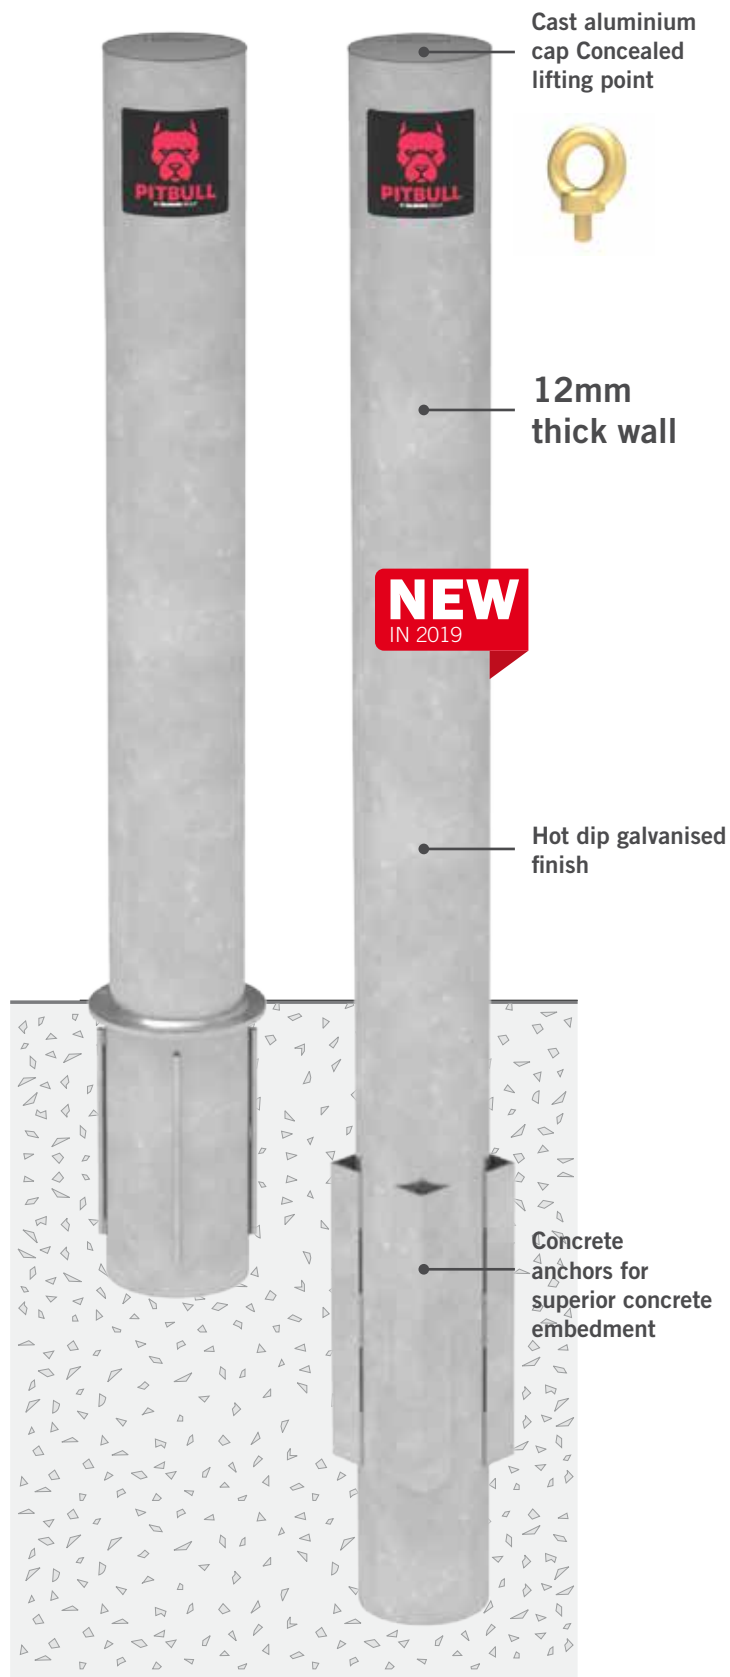

Part No.	Bollard diameter	Height above ground	Depth below ground	Wall thickness	Kgs	Finish
CPB168BG-G	168	1200	800	12	100	HDG
CPB168CD-G	168	1200	300	12	80	HDG