


# NESS AUX RECEIVER

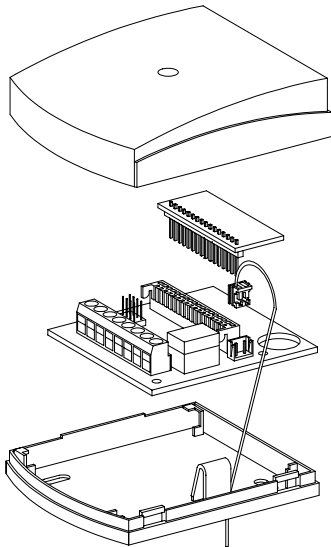

## NESS AUX RECEIVER

The Ness 100-099 AUX Receiver provides a separate relay output driven by the AUX button on the Ness RK4 Radio Key.

This allows the receiver to control almost any electrical device with the convenience of mounting the receiver close to the equipment being controlled.


The AUX Receiver receives the AUX button and PANIC button transmissions from the RK4 and can be used with up to four Ness RK4 Radio Keys.

**NOTE:** Most Ness control panels have an auxiliary output. A separate AUX Receiver gives the added convenience of an auxiliary output anywhere on the premises.


The AUX Receiver is a standalone receiver that operates totally independently. It does not need a control panel to operate. In fact, it is possible to program an RK4 radio key to operate the AUX output on a Ness control panel and an Aux Receiver simultaneously.

- USED WITH THE NESS RK4 RADIO KEY, PROVIDES AUX & PANIC OUTPUTS
- RELAY OUTPUT AUX OUTPUT
- OPEN COLLECTOR PANIC OUTPUT
- HUNDREDS OF USES

Dimensions.....	73(h) x 73(w) x 27(d) mm
Operating voltage .....	9-16V DC
Quiescent current draw .....	13mA
Relay output .....	NO and NC 1Amp 28Volts Max
Panic/Tamper .....	open collector output 40mA
Low battery .....	open collector output 40mA
Momentary output ON time ...	2 Seconds
Radio frequency .....	303.85MHz
Compatibility .....	100-067 RK4 Radio Key (AUX & Panic channels) 100-664 RK3 Radio Key (Panic channel only)

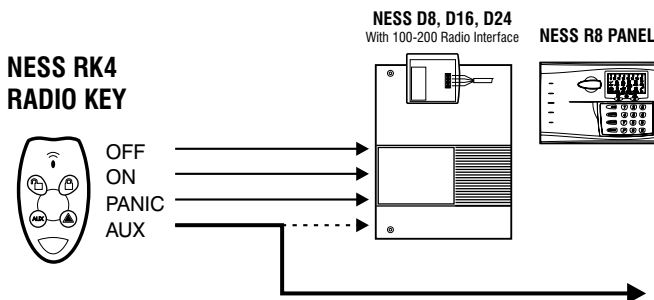

## NESS 100-099 AUX RECEIVER



- RELAY OUTPUT TO:**
- Garage door controller
  - Lighting
  - Sprinkler systems
  - Almost any electrical equipment

Note: The Ness D8 and D16 control panels have an onboard AUX output. This example shows an AUX receiver being used as an optional accessory when an output is needed separate to the control panel.

**SYDNEY** 02 8825 9222 sales@ness.com.au  
**MELBOURNE** 03 9875 6400 nessmelb@ness.com.au  
**BRISBANE** 07 3399 4910 nessbris@ness.com.au  
**PERTH** 08 9328 2511 nessper@ness.com.au  
**ADELAIDE** 08 8277 7255 adelaide@ness.com.au



Security Products

www.ness.com.au

